

BBNRV

CHECK VALVE



Description


Check valve **BBNRV** prevents fluid from flowing backwards. It ensures that fluid flows in only one direction.

It can be used to prevent water hammer.

Check valve opens when the pressure of the fluid exceeds the pressure applied by the spring. When the two pressures are compensated, the valve closes. A higher counter-pressure will ensure the valve closes. Valve design is optimized for vertical position installation.






VALVE STRUCTURE	
Connections from DN15 to DN150 - 1/2" to 4"	DIN 11850-2, BS (RJT), Clamp
Material in contact with the product	AISI 316L (1.4404)
Material gaskets in contact with the product (FDA homologation)	EPDM, FKM, VMQ
Max product temperature (EPDM applications with air)	140 °C (280 °F)
Min product temperature (EPDM applications with air)	-10 °C (14 °F)
Max working pressure	10 bar (145 psi)
Roughness	Ra ≤ 0.8 std Ra ≤ 0.4 On request
Closure test	0,7 bar

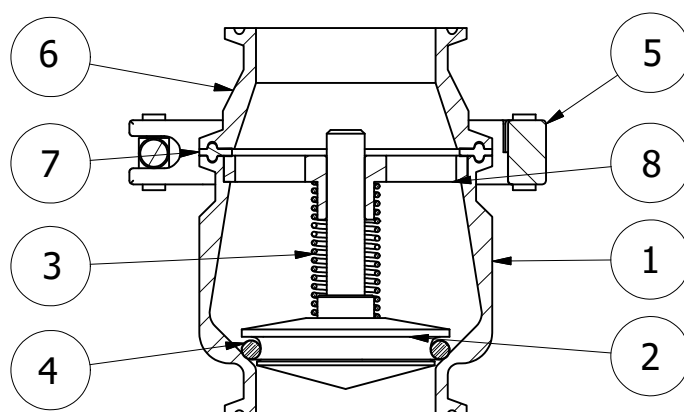

PARTS LIST	
Pos.	Description
1	Valve body
2	Plug
3	Spring
4	O-ring
5	Clamp
6	Reducer
7	Gasket
8	Diaphragm

BBNRV CHECK VALVE DIMENSIONS

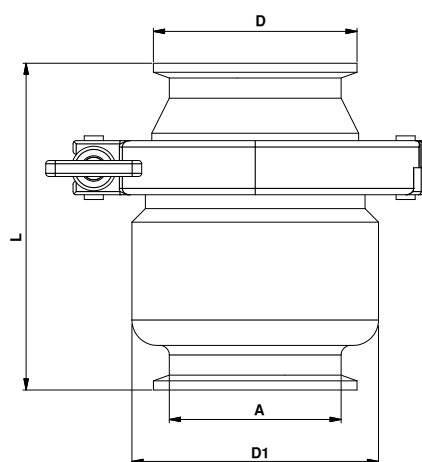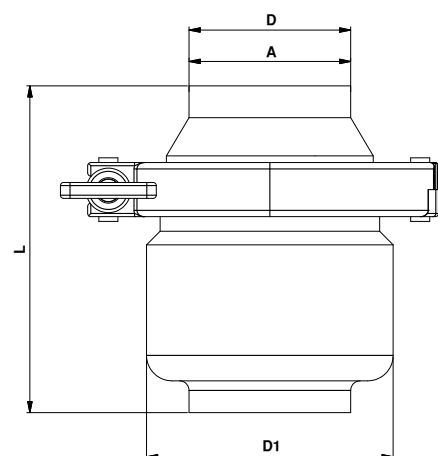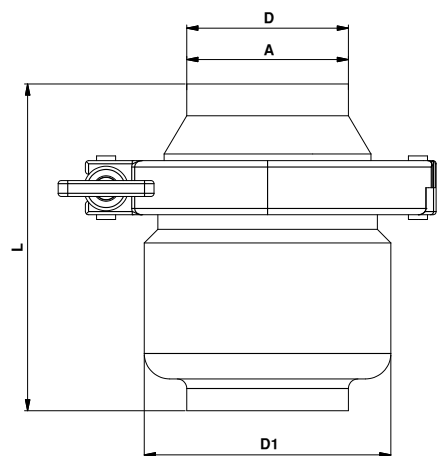

S / S				
DN	A	D	D1	L
25	29x1.5	29	50,5	94
32	35x1,5	35	50,5	95
40	41x1,5	41	64	101,5
50	53x1.5	53	77,5	102
65	70x2	70	106	123
80	85x2	85	130	127
100	104x2	104	148	124
125	129X2	129	160	145
150	154X2	154	210	164

S / S				
DN	A	D	D1	L
1/2"	12,7X1,65	12,7	25	74
3/4"	19X1,65	19	40	75
1"	25,4X1,65	25,4	50,5	94
1"1/2	38,1X1,65	38,1	64	95
2"	50,8X1,65	50,8	77,5	105
2"1/2	63,5X1,65	63,5	91	110
3"	76,2X1,65	76,2	119	125
4"	101,6X1,65	101,6	129	136

CLAMP				
DN	A	D	D1	L
1/2"	12,7X1,65	25	25	74
3/4"	19X1,65	25	40	75
1"	25,4X1,65	40,5	50,5	94
1"1/2	38,1X1,65	50,5	64	95
2"	50,8X1,65	64	77,5	102
2"1/2	63,5X1,65	77,5	91	110
3"	76,2X1,65	91	119	125
4"	101,6X1,65	119	129	136

CLAMP DIN				
DN	A	D	D1	L
25	29x1.5	50,5	50,5	94
32	35x1,5	50,5	64	95
40	41x1,5	50,5	64	101,5
50	53x1.5	64	77,5	102
65	70x2	91	106	123
80	85x2	106	130	127
100	104x2	119	148	124
125	129X2	155	160	145
150	154X2	183	210	164